



equipments



COMPRESSION SPRAYERS - SUPER 2S

The most complete line of high quality and professional products to fight endemic diseases and pest control. Ideal for PCO and Public Health, complying with international standards.



Spraying with curved 120° boom





Spraying with curved 120° boom and telescopic boom



Spraying with telescopic boom

Compression Sprayers - Super 2S

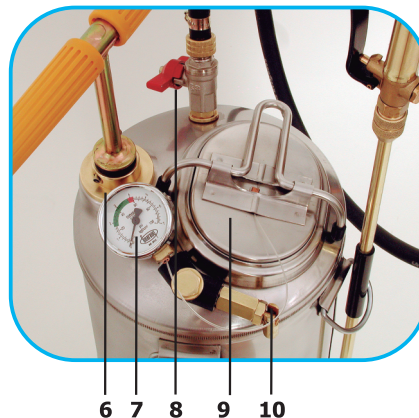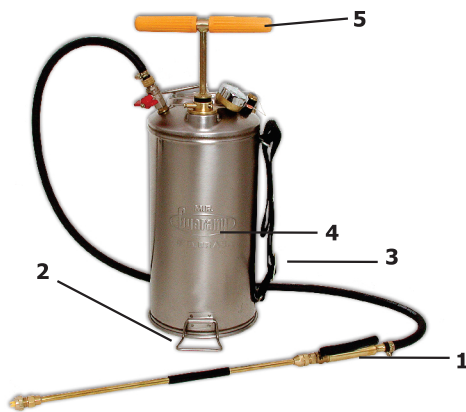

Illustrative photo

Applications:

Specially designed for Public Health.

High efficiency in the control of endemic diseases such as:

- Dengue
- Yellow fever
- Malaria
- Chagas' disease

Suitable for heavy-duty work. As it is not necessary to pump during the application the operator remains with one hand free for tasks such as handling the telescopic boom.

Features:

1- Super 6 Discharge set: brass, with universal nozzle holder, stainless steel 100 mesh filter and flat fan stainless steel spraying tip (8002 E).

2- Retractable Footrest: provides stability to the equipment during application, offering safety and comfort.

3- Carrying strap: in polypropylene with adjustable buckles. Ideal for heavy duty use.

4- Tank: electronically welded stainless steel tank, with graduations in litres and gallons. Large opening to make filling and cleaning easier.

5- Pump handle: triple function, for loosening or tightening the pump cylinder, pressurising the tank and carrying the machine.

7- Pressure Gauge: resistant forged brass with 0 to 100 psi scale, with green band (25-55 psi), indicating safe operating range.

8- In-line tap: on the upper part of the tank, allowing the internal pressure of the tank to be maintained when removing the hose and the discharge set.

9- Tank cap: with a positive sealing system (pressure activated) which allows instant shut-off with better sealing.

10- Safety valve: with automatic air release in case of overpressure or manual release to allow opening the tank.

Double filtering system, with filters at the valve and at the nozzle.

Accessories to optimize applications:



code 4751
Curved 120° boom



code 4750
Boom with swivel
nozzle rotative 360°



Code 4748
Telescopic boom
0.66m to 1.24m

technical specification

	code 441-13	code 441-10	code 441-11
Total capacity	7,6 L (2,0 gal).....	11,4 L (3,0 gal).....	15,2 L (4,0 gal)
Useful capacity	5,0 L (1,32gal).....	8,0 L (2,0 gal).....	11,25 L (3,0 gal)
Net weight.....	4,6 kg (10,1 lb).....	5,5 kg (12,1 lb).....	6,0 kg (13,2 lb)
Maximum working pressure.....	414 kPa (60 psi).....	414 kPa (60 psi).....	414 kPa (60 psi)
Packaging.....	245 x 245 x 460mm..... (9,6" x 9,6" x 18,1")	245 x 245 x 590mm..... (9,6" x 9,6" x 23,2")	245 x 245 x 720mm..... (9,6" x 9,6" x 28,3")

Guarany`s Mission: to offer the best quality products, with innovative features that can be of public use, as well as the best services, always respecting the environment, people and markets, besides guaranteeing the satisfaction of our customers and employees.



tradition and technology
www.guaranyind.com.br

rod. waldomiro correa de camargo, km 56,5
cep 13308-200 itu sp brasil (55 11) 2118 8400

Distributor



THE
PROFESSIONAL SPRAYERS
PEOPLE